


Cu/PVC/PVC-Unarmoured Three core (with Sector Shape conductors)

Application	Cables specified in this table are intended for use in fixed installations in industrial areas, buildings and similar applications. The insulation and other components are suitable to permit operation of the cables at a maximum sustained conductor temperature of 70 °C.
Type	Cu/PVC/PVC
Standards	BS 6346
Nominal Voltage	600/1000V
Insulation	70 °C rated PVC compound
Sheath	PVC compound
Packing	Packaging in drums as required by the customer
Conductor	Soft Annealed Cu Wires

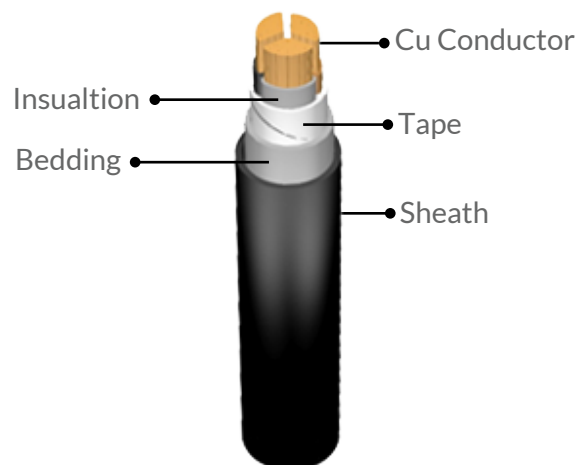

ITEM	N.C.	NO:/NOM	INSU.	SHEATH	SHEATH
CODE	AREA	DIA	THICK.	THICK.	O.D.
	mm ²	mm	mm	mm	mm
C - 103	25	7	1.2	1.8	20.2
C - 104	35	7	1.2	1.8	22
C - 105	50	7	1.4	1.8	25
C - 106	70	19	1.4	1.9	28.2
C - 107	95	19	1.6	2.1	32.4
C - 108	120	19	1.6	2.2	34.8
C - 109	150	19	1.8	2.3	38.4
C - 110	185	37	2	2.5	42.8
C - 111	240	37	2.2	2.6	48
C - 112	300	37	2.4	2.8	52.8
C - 113	400	61	2.6	3.1	59