


Al/XLPE/SWA/PVC- Armoured Three core Circular Cable

Application	Cables specified in this table are intended for use in fixed installations in industrial areas, buildings and similar applications. The insulation and other components are suitable to permit operation of the cables at a maximum sustained conductor temperature of 90 °C.
Type	Al/XLPE/AWA/PVC
Standards	BS 5467
Nominal Voltage	600/1000V
Insulation	90°C rated XLPE compound
Sheath	PVC compound
Armour	Plain Aluminium wires
Packing	Packaging in drums as required by the customer
Conductor	Plain Aluminium wires

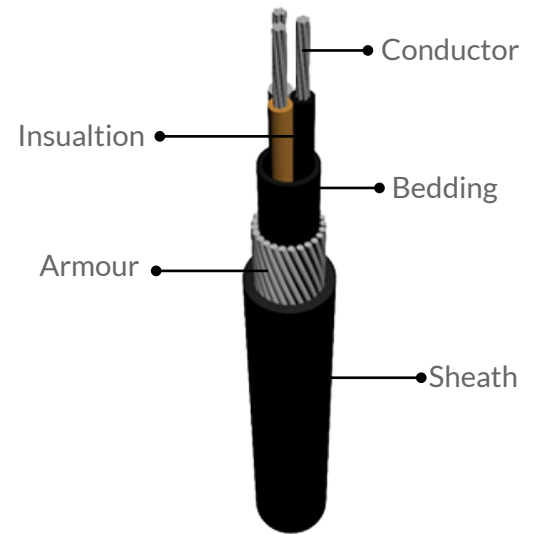

ITEM CODE	N.C. AREA	NO:/NOM DIA	INSU. THICK.	BEDD. THICK.	BEDD. O.D.	ARM.WIRE DIA.	SHEATH THICK.	SHEATH O.D.
	mm ²	mm	mm	mm	mm	mm	mm	mm
L - 26	10	7/1.35	0.7	0.8	13.34	1.25	1.5	18.84
L - 27	16	7/1.70	0.7	0.8	15.6	1.25	1.6	21.3
L - 28	25	7/2.14	0.9	1	19.71	1.6	1.7	26.31
L - 28sub	25	19/1.35	0.9	1	20.42	1.6	1.7	27.02
L - 29	35	7/2.52	0.9	1	22.16	1.6	1.8	28.96
L - 29sub	35	19/1.53	0.9	1	22.36	1.6	1.8	29.16