


Cu/PVC/PVC-Unarmoured Four core (with Sector Shape conductors)

Application	Cables specified in this table are intended for use in fixed installations in industrial areas, buildings and similar applications. The insulation and other components are suitable to permit operation of the cables at a maximum sustained conductor temperature of 70 °C.
Type	Cu/PVC/PVC
Standards	BS 6346
Nominal Voltage	600/1000V
Insulation	70 °C rated PVC compound
Sheath	PVC compound
Packing	Packaging in drums as required by the customer
Conductor	Soft Annealed Cu Wires

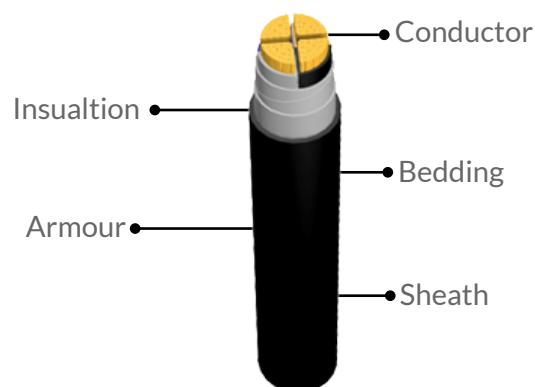

ITEM	N.C.	NO:/NOM	INSU.	SHEATH	SHEATH
CODE	AREA	DIA	THICK.	THICK.	O.D.
	mm ²	mm	mm	mm	mm
C - 118	25	7	1.2	1.8	23.45
C - 119	35	7	1.2	1.8	25.88
C - 120	50	7	1.4	1.9	30.14
C - 121	70	19	1.4	2	33.77
C - 122	95	19	1.6	2.2	38.83
C - 123	120	19	1.6	2.3	42.23
C - 124	150	19	1.8	2.5	47.06
C - 125	185	37	2	2.6	51.84
C - 126	240	37	2.2	2.8	58.25
C - 127	300	37	2.4	3.1	64.7
C - 128	400	61	2.6	3.3	73.2